

# ***HSM 40VL Baler for FA400 Shredders***

Product Brochure



*Provided by*

**MyBinding.com**

*When Image Matters.*

Call Us at 1-800-944-4573

ENVIRONMENTAL  
TECHNOLOGY

# ***HSM Vertical Baling Presses***

## ***Waste Management Solutions for Manufacturers and Retailers***



**HSM**®



## ***With HSM – Turn your waste into valuable material!***

### ***Packaging can become a problem***

*Packaging is indispensable for transporting products safely. But it can quickly become a problem when it begins to pile up, block valuable space and entail expensive personnel costs.*

### ***We turn waste into valuable material***

*However, considered as part of the recycling chain, used packaging becomes a valuable secondary raw material. HSM has solutions for handling and compacting this raw material using tried-and-tested technology and innovative solutions.*

### ***HSM has the answer***

*HSM builds baling presses which compress cardboard or packaging material into compact bales weighing up to 550 kg. This high degree of compression saves expensive storage space and makes transport and handling easier.*

### ***Compact load – the HSM vertical baling presses***

*Due to their size, cost efficiency and capacity, the vertical baling presses are incredibly well-suited for industry, manufacturers and retailers alike. With these compact baling presses you can reduce the volume of your on-site packaging material by up to 95%.*





## The HSM V-Press compact advantages:

- **Attractive cost/performance ratio**

The HSM V-Press series combines the outstanding quality standards of HSM environmental technology with a high level of profitability. Due to both their performance and durability, they are the economic waste management solution par excellence: The HSM V-Press reduces costs of the most underestimated cost centre: "waste disposal."

- **Service to fit your needs**

In the HSM V-Press series you will find exactly the right baling press to fit your needs. For instance, you can choose the machine according to the volume and pressing power required for your operations.

- **Optimal bale size and weight**

The bales have the ideal size for perfect HGV load utilisation. This saves on transport costs and increases the marketing efficiency of the bales, which the large waste disposal companies will buy from you as valuable material.

- **Easy-to-use**

The entire pressing cycle, beginning with closing the door, is fully automatic. A text display informs you in detail about the respective status of the process. When the pressing procedure comes to an end, the sliding door opens automatically. Extracting the bale is simple and easy, and it can be comfortably transported on a pallet.


- **High operational flexibility**

With the HSM V-Press you can decide whether you prefer to press cardboard or plastic film at the touch of a button.

- **Extremely high level of process reliability**

Thanks to the newly developed HSM TCS (TorsionControlSystem), the angle of the press ram is monitored continuously in every direction. This avoids one-sided overcharge, optimises the pressing procedure and assures longer service life.

**Putting our experience into every detail!**

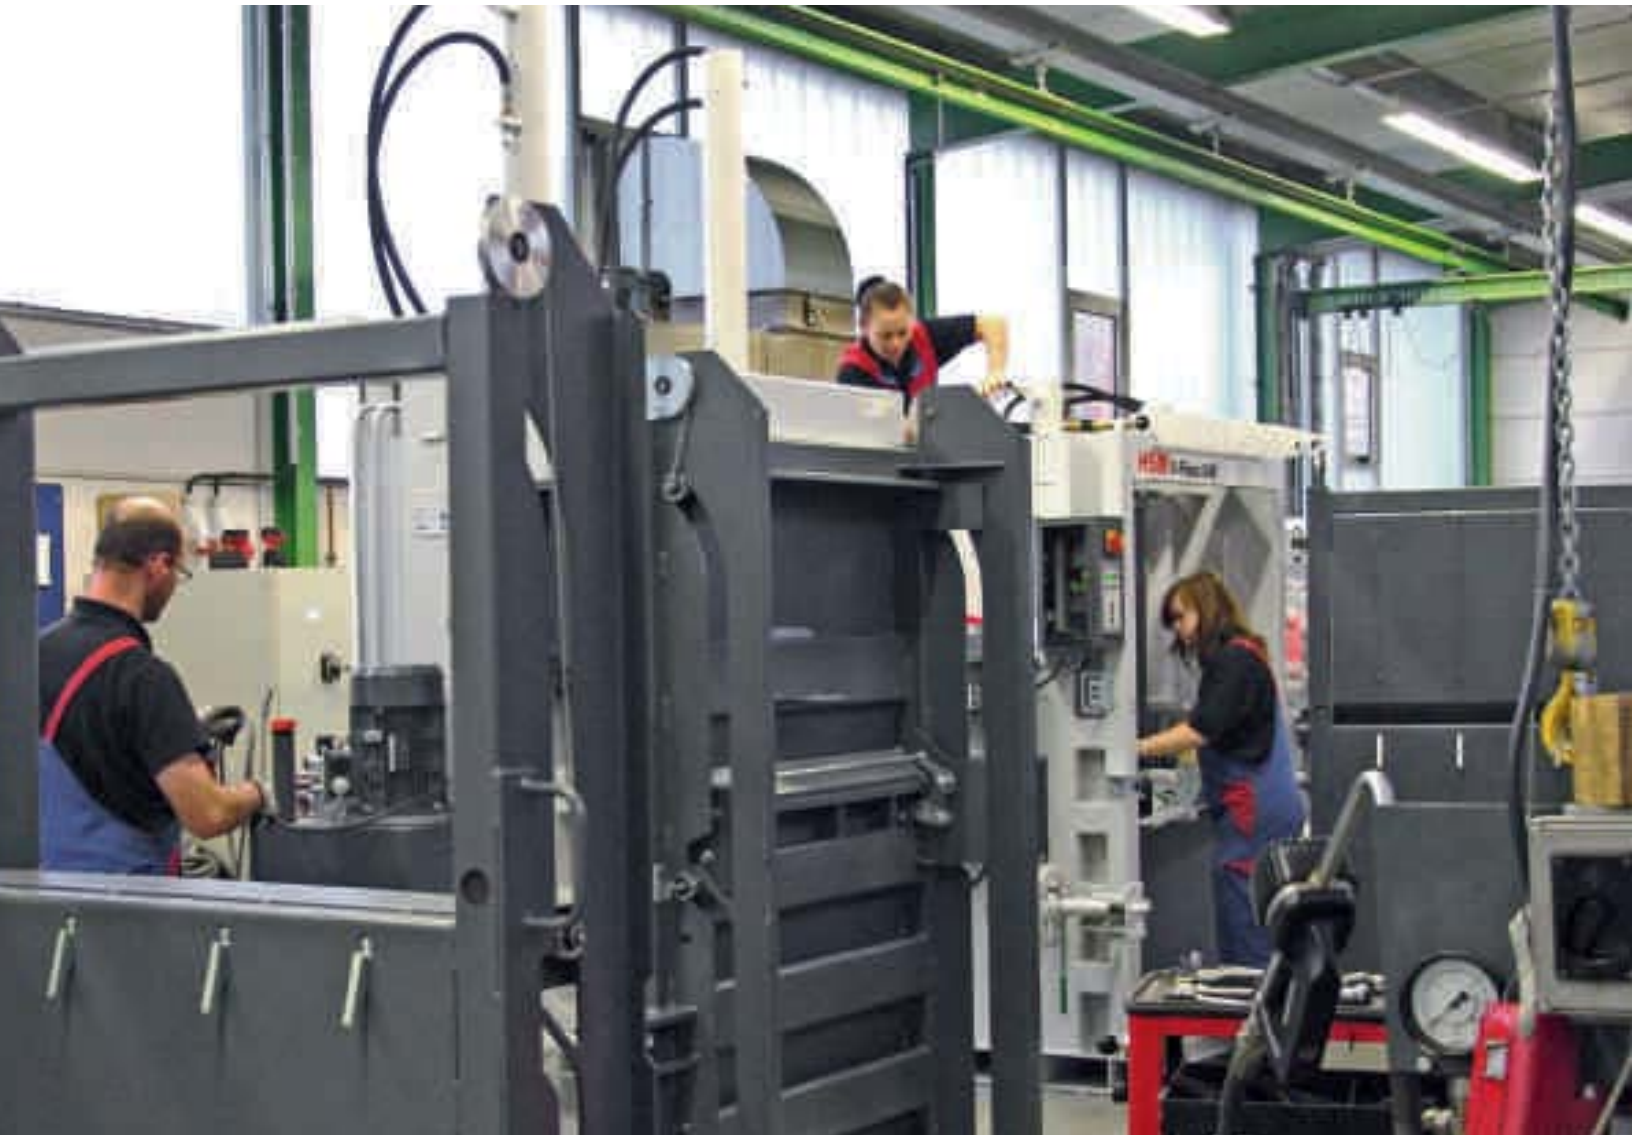

Press plate

**Optimized pressing**

- Massive press ram and extremely robust press plate guidance.
- Integrated HSM TCS (Torsion Control System) prevents one-sided overcharge during the pressing procedure.\*



Security switch

**Convenient and secure automatic start**

- Pressing procedure starts automatically upon closing the door.
- Upon opening the door, a security switch assures an automatic stop of the pressing procedure.



Keypad with display

**Data display and controller**

- Modern microprocessor control with membrane keypad and graphical display.\*
- Display of the respective current status
- Selectable programmes for pressing plastic film or cardboard.

\* FP3000 without HSM TCS and without display, V-Press 605, 610 and MKP80 without HSM TCS



## The three configurations:



Double door with hand wheel door lock (except V-Press 504 - double door with bell-crank lever instead)



Sliding door with hand wheel door lock (except V-Press 818 plus, 820 plus and 825 plus - loading flap instead)



Sliding door with hydraulic door lock; additional covers optional for all three configurations.



Self-engaging locking system

### Safe locking-system

Absolutely safe and easy-to-operate locking system – self-engaging.



Wire or tape strapping

### Strapping

Tape strapping for V-Press 504, 605, 610, 818, 820 and MKP. Wire strapping for V-Press 840, 860, 1160 standard and tape strapping optional – strapping can then be chosen as required.



Pallet spacer

### Easy bale ejection

User-friendly, easy-to-operate bracket used to activate the bale ejection device.

### Sophisticated details

Spacer for optimum positioning of the euro-pallet.



Cardboard bales

Plastic foil bales

Hartkunststoff-Ballen

PET bales



## Volume reduction for cardboard, foil, plastic, PET

Whatever material you want to compress, you get compact bales which are easy to transport. Select the V-Press from the range which best suits your area of application and the recyclable materials to be baled. You will soon be compressing cardboard, foils, PET bottles, stiff plastics or expansive plastics into handy bales. (Other materials on request.)

**Use our product finder at [www.hsm.eu](http://www.hsm.eu)**

## HSM V-Press 60

The manual baling press

**The mobile baling press HSM V-Press 60 compresses plastic film and lightweight packaging material right where the material is.**

- The used packing material is fed into the HSM V-Press 60 immediately after unpacking and does not need to be transported to interim storage
- The lever action allows the HSM V-Press 60 to produce well-compressed, stackable bales – compression 5:1 and more
- Effortless to operate with a minimum amount of strength
- Does not need any electricity, servicing or maintenance
- Bales produced can be re-pressed in hydraulic HSM baling presses, i.e. compressed into denser and larger bales.

Model	HSM V-Press 60
Pressing power in kN	-
Motor in kW	-
Voltage / Frequency	-
Loading aperture W x H in mm	740 x 635
Bale weight in kg (depending on material)	up to 40
Bale size L x W x H in mm	800 x 600 x max. 800
Hourly output in bales	-
Cycle time in idle operation (theor.) in sec.	-
Volume throughput in idle operation (theor.) in m <sup>3</sup> /h	-
Press chamber size W x D x H in mm	-
Dimensions of machine W x D x H in mm	810 x 735 x 1280
Machine weight in kg	95
Strapping	3-fold crosswise with strapping twine

Technical and design modifications reserved. All technical data and dimensions are approximate values.



## HSM V-Press 504

**Small footprint and easy installation**

**The entry-level model HSM V-Press 504 allows for the economical disposal of your packaging waste.**

- Compact and sturdy design - small footprint
- Modern microprocessor controller with membrane keypad and text display
- Selectable programmes for pressing cardboard or plastic foil
- Bale removal and transport with discharge trolley
- HSM TCS (Torsion Control System) for monitoring press ram movement
- Automatic return stroke
- Configuration:  
eco – double door with bell-crank lever

## HSM V-Press 605 / 610

**Versatile and compact**

**The HSM V-Press 605 and HSM V-Press 610 reduce the volume of cardboard or foils in an economical way.**

- Low installation height and surface
- Special retaining claws optimize the compression of the pressing material, increasing both the loading volume and bale output
- Quick and easy press assembly
- Mechanical bale ejector
- Configuration:  
eco – double door with handwheel door lock

<b>HSM V-Press 504</b>	<b>HSM V-Press 605*</b>	<b>HSM V-Press 610</b>
40	57	120
1,1	1,5	3
1 x 230 V / 50 Hz	3 x 400 V / 50 Hz	3 x 400 V / 50 Hz
700 x 470	800 x 495	800 x 495
up to 50	up to 70	up to 100
700 x 500 x max. 600	800 x 600 x max. 600	800 x 600 x max. 600
3 - 6	3 - 6	3 - 6
27	21	22
37	60	58
700 x 500 x 1020	800 x 600 x 1045	800 x 600 x 1045
888 x 787 x 1922	1190 x 815 x 1980	1190 x 815 x 1980
300	500	540
2-fold with polyester tape	3-fold with polyester tape	3-fold with polyester tape

\* V-Press 605 also available for AC power supply (1 x 230 V / 50 Hz).

Technical and design modifications reserved. All technical data and dimensions are approximate values.





## HSM V-Press 818

### Variety of uses

**Thanks to its low transport height, the HSM V-Press 818 can be easily transported to wherever it needs to be used.**

- Low installation height and small footprint
- High process reliability due to HSM TCS (TorsionControlSystem)
- Convenient membrane keypad with text display, which shows the current status of the machine
- Long service life due to low maintenance, reliable hydraulics and hard chrome-plated piston rod
- Configurations:  
eco – double door with hand wheel door lock  
plus – loading flap with hand wheel door lock



## HSM V-Press 820

### A strong disposal station

**Thanks to its powerful motor, its ergonomic design and its sophisticated and innovative technology, the HSM V-Press 820 combines all of the advantages of a baling press into one machine.**

- State-of-the-art microprocessor controller and membrane keypad with LED display
- Special retaining claws optimize the compression of the pressing material, increasing both loading volume and bale output
- Quick and easy press assembly
- Configurations:  
eco – double door with hand wheel door lock  
plus – loading flap with hand wheel door lock

Model	HSM V-Press 818	HSM V-Press 820
Pressing power in kN	185	178
Motor in kW	3	4
Voltage / Frequency	3 x 400 V / 50 Hz	3 x 400 V / 50 Hz
Loading aperture W x H in mm	1195 x 541 (eco), 1195 x 530 (plus)	1195 x 610 (eco), 1195 x 558 (plus)
Bale weight in kg (depending on material)	up to 200	up to 250
Bale size L x W x H in mm	1200 x 780 x max. 700	1200 x 780 x max. 1000
Hourly output in bales	2 - 5	2 - 5
Cycle time in idle operation (theor.) in sec.	35	23
Volume throughput in idle operation (theor.) in m <sup>3</sup> /h	68	111
Press chamber size W x D x H in mm	1200 x 780 x 1300	1200 x 780 x 1400
Dimensions of machine W x D x H in mm	1700 x 1046 x 2370	1700 x 1075 x 2470
Machine weight in kg	994 (eco), 1031 (plus)	1265 (eco), 1300 (plus)
Strapping	4-fold with polyester tape	4-fold with polyester tape

Technical and design modifications reserved. All technical data and dimensions are approximate values.



## HSM V-Press 825

**Powerful and convenient**

**The HSM V-Press 825 is characterized by its very low transport height.**

- Robust mechanical bale ejector belt for easy bale removal
- Special hydraulic cylinders with hard-chrome plated pistons reduce wear, prevent breakdowns and prolong service life
- Low installation height and small footprint
- High process reliability due to HSM TCS (TorsionControlSystem)
- Configurations:  
eco – double door with hand wheel door lock  
plus – loading flap with hand wheel door lock

## HSM V-Press 840 / 860

**Service and efficiency**

**The HSM V-Press 840 and HSM V-Press 860 provide first-class results and delivers highly compressed bales, even with heavily expansive materials and are though the most economical and ecological solution for your waste disposal.**

- Special retaining claws optimize the compression of the pressing material and reduce the number of loading actions
- Comfortable, easy-to-use membrane keypad with text display which show the current status of the machine
- Configurations:  
eco – double door with hand wheel door lock  
plus – sliding door with hand wheel door lock  
max – sliding door with hydraulic door lock

### HSM V-Press 825

250
3
3 x 400 V / 50 Hz
1195 x 541 (eco), 1195 x 530 (plus)
up to 280
1200 x 780 x max. 700
2 - 5
35
68
1200 x 780 x 1300
1700 x 1046 x 2370
1026 (eco), 1063 (plus)
4-fold with polyester tape

### HSM V-Press 840

356
4
3 x 400 V / 50 Hz
1195 x 650
up to 360
1200 x 780 x max. 1200
1 - 2
44
58
1195 x 780 x 1640
1780 x 1069 x 2985 (eco)
1780 x 1247 x 2985 (plus, max)
1672 (eco), 1800 (plus), 1819 (max)
4-fold with wire / optional polyester tape

### HSM V-Press 860

532
7,5
3 x 400 V / 50 Hz
1195 x 650
up to 480
1200 x 780 x max. 1200
1 - 2
46
57
1195 x 780 x 1640
1797 x 1070 x 2985 (eco), 1797 x 1247 x 2985 (plus, max)
1889 (eco), 2010 (plus), 2083 (max)
4-fold with wire / optional polyester tape

Technical and design modifications reserved. All technical data and dimensions are approximate values.



## HSM V-Press 860 L

**Optimized bale transport economy**

**The HSM V-Press 860 L produces bales with a recess for easy transport without pallets.**

- Special profiles in the bale ejection door, in the filling hatch and in the press ram form recesses in the bales
- Flexible and fixed retaining claws optimise material compression and reduce the number of filling processes
- High process reliability due to HSM TCS (TorsionControlSystem)
- Convenient membrane keypad with text display, which shows the current status of the machine
- Solid press ram and extremely stable press ram guidance
- Configuration:  
Double doors with hydraulic door lock



## HSM V-Press 860 P

**Designed for PET bottles**

**The vertical baling press HSM V-Press 860 P is specially designed for the compression of opened or perforated PET/UBC bottles (other materials upon request).**

- Double quantity of retaining claws optimize the compression of the pressing material and reduce the number of loading actions
- Reinforced press chamber and door lock
- Robust mechanical bale ejector chain
- Configuration:  
PET/UBC door with hydraulic door lock

Model	HSM V-Press 860 L	HSM V-Press 860 P
Pressing power in kN	532	418
Motor in kW	7.5	7.5
Voltage / Frequency	3 x 400 V / 50 Hz	3 x 400 V / 50 Hz
Loading aperture W x H in mm	1195 x 650	1195 x 650
Bale weight in kg (depending on material)	up to 460	up to 230
Bale size L x W x H in mm	1200 x 780 x max. 1200	1200 x 780 x max. 1200
Hourly output in bales	1 - 2	1 - 2
Cycle time in idle operation (theor.) in sec.	46	46
Volume throughput in idle operation (theor.) in m <sup>3</sup> /h	57	57
Press chamber size W x D x H in mm	1195 x 780 x 1640	1195 x 780 x 1640
Dimensions of machine W x D x H in mm	1797 x 1247 x 2985	1797 x 1273 x 2985
Machine weight in kg	1936	2220
Strapping	4-fold with wire / optional polyester tape	4-fold with wire

Technical and design modifications reserved. All technical data and dimensions are approximate values.





## HSM V-Press 860 S

*For special materials*

**The model HSM V-Press 860 S is the perfect machine for the volume reduction of stiff plastics (e.g. monitor and TV set housings) and expanding plastic film (other materials upon request).**

- Double quantity of retaining claws optimize the compression of the pressing material and reduce the number of loading actions
- Reinforced press chamber and door lock
- Robust mechanical bale ejector chain
- Explosion protected model as per EX II G cb IIB T3 available on request
- Configuration:  
lateral attached door with hydraulic door lock

## HSM V-Press 1160

*Most powerful*

**With a maximum bale weight of 550 kg, strong pressing power and an absolutely high efficiency level, the HSM V-Press 1160 is the top-model of the HSM V-Press series.**

- High capacity press chamber means optimum filling efficiency
- Low-maintenance, sturdy hydraulics and hard-chromed pistons ensure long service life
- Highly compressed bales which can already be marketed without requiring any further pressing
- Configurations:  
eco – double door with hand wheel door lock  
plus – sliding door with hand wheel door lock  
max – sliding door with hydraulic door lock

### **HSM V-Press 860 S**

418  
7.5  
3 x 400 V / 50 Hz  
1195 x 650  
depending on material  
1200 x 780 x max. 1200  
1 - 2  
46  
57  
1195 x 780 x 1640  
1797 x 1076 x 2985

### **HSM V-Press 1160**

532  
7.5  
3 x 400 V / 50 Hz  
1195 x 650  
up to 550  
1200 x 1100 x max. 1200  
1 - 2  
46  
78  
1195 x 1100 x 1640  
1780 x 1388 x 2990 (eco),  
1780 x 1568 x 2990 (plus), 1780 x 1568 x 2995 (max)  
2294 (eco), 2403 (plus), 2430 (max)  
4-fold with wire /  
optional polyester tape

*Technical and design modifications reserved. All technical data and dimensions are approximate values.*



## HSM MKP 80

**Guaranteed fully sorted disposal**

**The HSM MKP 80 multiple chamber baler is ideally suited to parallel, sorted compression of various materials.**

- Large aperture and chamber for ease of loading
- HSM MKP 80 has a bale removal trolley for easy removal and transport of bales
- State-of-the-art microprocessor controller and membrane keypad with display
- Excellent door locking system protects the user
- Special retaining claws optimize the compression of the pressing material, increasing both loading volume and bale output



## HSM FP 3000

**Robust and reliable**

**With a pressing power of 270 kN the HSM FP 3000 is excellently suited for pressing light metal and rolled hoop barrels.**

- Low height and small footprint
- Press ram with spikes for opening the barrels and collectortray for residual liquid
- Enclosed on all sides with inspection window for safety and dust reduction
- Membrane key-pad with LED for operator safety
- Automatic return stroke saves time, overheads and personnel costs
- Low-maintenance and durable electro-hydraulics
- Explosion protected model as per EX II G cb IIB T3 available on request

Model	HSM MKP 80	HSM FP 3000
Pressing power in kN	75	270
Motor in kW	2.2	7.5
Voltage / Frequency	3 x 400 V / 50 Hz	3 x 400 V / 50 Hz
Loading aperture W x H in mm	700 x 500	–
Bale weight in kg (depending on material)	up to 80	–
Bale size L x W x H in mm	700 x 500 x max. 800	–
Barrel type / barrel size up to 200 l, Ø x H in mm	–	light metal and rolled hoops / 618 x 1092
Hourly output in bales / barrels	2 - 4	bis 50
Cycle time in idle operation (theor.) in sec.	24	33
Volume throughput in idle operation (theor.) in m <sup>3</sup> /h	32	–
Press chamber size W x D x H in mm	700 x 500 x 1000	–
Dimensions of machine W x D x H in mm	1820 x 1120 x 2170	1168 x 960 x 2892
Machine weight in kg	885	970
Strapping	3-fold with polyester tape	–

# Consumable materials

To enable you to use your HSM vertical baling press for all types of application, we offer you the right consumable material.

## Strapping twine




Item number	Suitable for press models with standard equipment	Length/roll	Weight/1000 pcs.
6201 993 000	V-Press 60	200	12 kg

## Polyester tape



Item number	Suitable for press models with standard equipment	Type	Tensile strength	Length/reel	Tape width	Weight/reel
6205 993 010	V-Press 504 / 605 / MKP 80	<b>WG 30</b>	280 kg	500 m	8.0 mm	2.2 kg
6212 993 010	V-Press 610 / 818 / 820 / 825	<b>WG 40</b>	380 kg	500 m	11.5 mm	3.3 kg
6314 993 000	V-Press 840	<b>WG 45</b>	580 kg	400 m	12.7 mm	3.9 kg
6514 993 000	V-Press 860 / 1160	<b>WG 55</b>	670 kg	400 m	14.6 mm	4.5 kg
6216 993 000	Very expansive materials	<b>WG 65</b>	800 kg	400 m	17.3 mm	5.3 kg
6216 993 050	Special applications	<b>HD 65</b>	950 kg	400 m	16.1 mm	7.1 kg

## Tape clamps



Item number	Item	Weight/1000 pcs
6127 990 101	Tape clamps	12 kg

## Eyelet wire



Item number	Suitable for press models with standard equipment	Wire diameter/length	Weight/roll
6135 993 002	V-Press 840 / 860	2.8 x 3700 mm	10 kg
6136 993 002	V-Press 1160	2.8 x 4400 mm	10 kg
6135 993 003	V-Press 860 P / 860 S	3.1 x 3700 mm	12 kg



\* does not apply for V-Press 60

### Find out more about HSM environmental technology expertise

HSM is one of the leading manufacturers of baling presses and document shredders worldwide. Get to know our whole product range at [www.hsm.eu](http://www.hsm.eu) and ask for our special catalogue.

Of course, we are happy to talk to you in person. Just call us, e-mail us or send us a fax.



## Technical details at a glance

Model	Version	Pressing power in kN	Motor in kW	Cycle time when idling (theor.) in sec.	Pressing power when idling (theor.) in m³/h	Bale size L x W x H in mm
<b>HSM V-Press 60</b>		-	-	-	-	800 x 600 x max. 800
<b>HSM V-Press 504</b>		40	1,1	27	37	700 x 500 x max. 600
<b>HSM V-Press 605</b>		57	1,5	21	60	800 x 600 x max. 600
<b>HSM V-Press 610</b>		120	3,0	22	58	800 x 600 x max. 600
<b>HSM V-Press 818</b>	eco	185	3,0	35	68	1200 x 780 x max. 700
	plus	185	3,0	35	68	1200 x 780 x max. 700
<b>HSM V-Press 820</b>	eco	178	4,0	23	111	1200 x 780 x max. 1000
	plus	178	4,0	23	111	1200 x 780 x max. 1000
<b>HSM V-Press 825</b>	eco	250	3,0	35	68	1200 x 780 x max. 700
	plus	250	3,0	35	68	1200 x 780 x max. 700
<b>HSM V-Press 840</b>	eco	356	4,0	44	58	1200 x 780 x max. 1200
	plus	356	4,0	44	58	1200 x 780 x max. 1200
	max	356	4,0	44	58	1200 x 780 x max. 1200
<b>HSM V-Press 860</b>	eco	532	7,5	46	57	1200 x 780 x max. 1200
	plus	532	7,5	46	57	1200 x 780 x max. 1200
	max	532	7,5	46	57	1200 x 780 x max. 1200
	L	532	7,5	46	57	1200 x 780 x max. 1200
	P	418	7,5	46	57	1200 x 780 x max. 1200
	S	418	7,5	46	57	1200 x 780 x max. 1200
<b>HSM V-Press 1160</b>	eco	532	7,5	46	78	1200 x 1100 x max. 1200
	plus	532	7,5	46	78	1200 x 1100 x max. 1200
	max	532	7,5	46	78	1200 x 1100 x max. 1200
<b>HSM FP 3000</b>		270	7,5	33	-	-
<b>HSM MKP 80</b>		75	2,2	24	32	700 x 500 x max. 800

### Explanations of the technical data:

Pressing power:	Cylinder piston surface multiplied by the maximum hydraulic pressure (theoretical value).
Motor:	Rated power of driving motor.
Voltage / Frequency:	Three-phase power supply.
Loading aperture:	Size of the opening through which material can be loaded.
Loading height:	Height from floor to loading edge.
Bale weight:	The bale weight varies depending on the type, humidity and condition of the compressed material and the bale length or height.
Bale size:	The height/length of the bales varies depending on the expansion force of the compressed material.
Hourly output:	The hourly output depends on the type and quantity of the material to be pressed and on the number of persons loading the machine.
Cycle time in idle operation (theor.):	The time it takes for the press ram to move down without material and return idling to the home position. The pressing time does not depend on the material.
Volume throughput in idle operation (theor.):	The maximum volume that can be theoretically pressed in one hour without interruption of the pressing procedure for loading or strapping. It is calculated by dividing the press chamber volume by the pressing time.
Press chamber size:	The press chamber is the space below the press ram in the home position.
Dimensions of machine:	External dimensions of the machine when set up for operation.
Transport height:	Height for moving to the installation site (without hand pallet truck).
Machine weight:	Net weight of the machine without packaging, loaded material or options.
Strapping:	The number of times the bales are strapped.

Bale weight in kg	Hourly output in bales	Strapping x times	Loading hatch W x H (mm)	Loading height in mm	Machine dimensions W x D x H in mm	Transport height in mm	Machine weight in kg
up to 40	-	3	740 x 635	1015	810 x 735 x 1280	1280	95
up to 50	3 - 6	2	700 x 470	661	888 x 787 x 1922	1922	300
up to 70	3 - 6	3	800 x 495	655	1190 x 815 x 1980	1980	500
up to 100	3 - 6	3	800 x 495	655	1190 x 815 x 1980	1980	540
up to 200	2 - 5	4	1195 x 541	871	1700 x 1046 x 2370	1950 (1735*)	994
up to 200	2 - 5	4	1195 x 530	871	1700 x 1046 x 2370	1950 (1735*)	1031
up to 250	2 - 5	4	1195 x 610	921	1700 x 1075 x 2470	1990	1265
up to 250	2 - 5	4	1195 x 558	928	1700 x 1075 x 2470	1990	1300
up to 280	2 - 5	4	1195 x 541	871	1700 x 1046 x 2370	1950 (1735*)	1026
up to 280	2 - 5	4	1195 x 530	871	1700 x 1046 x 2370	1950 (1735*)	1063
up to 360	1 - 2	4	1195 x 650	1100	1780 x 1069 x 2985	2168 (2140*)	1672
up to 360	1 - 2	4	1195 x 650	1100	1780 x 1247 x 2985	2168 (2140*)	1800
up to 360	1 - 2	4	1195 x 650	1100	1780 x 1247 x 2985	2168 (2140*)	1819
up to 480	1 - 2	4	1195 x 650	1100	1797 x 1070 x 2985	2168 (2140*)	1889
up to 480	1 - 2	4	1195 x 650	1100	1797 x 1247 x 2985	2168 (2140*)	2010
up to 480	1 - 2	4	1195 x 650	1100	1797 x 1247 x 2985	2168 (2140*)	2083
up to 460	1 - 2	4	1195 x 650	1100	1797 x 1247 x 2985	2168 (2140*)	1936
up to 230	1 - 2	4	1195 x 650	1115	1797 x 1273 x 2985	2140	2220
dep. on material	1 - 2	4	1195 x 650	1100	1797 x 1076 x 2985	2140	2246
up to 550	1 - 2	4	1195 x 650	1115	1780 x 1388 x 2990	2168 (2140*)	2294
up to 550	1 - 2	4	1195 x 650	1115	1780 x 1568 x 2990	2168 (2140*)	2403
up to 550	1 - 2	4	1195 x 650	1115	1780 x 1568 x 2995	2168 (2140*)	2430
-	up to 50	-	-	-	1168 x 960 x 2892	1917	970
up to 80	2 - 4	3	700 x 500	1197	1820 x 1120 x 2170	1990	885

\* with tape station dismantled

## Experience HSM's quality and service!

### Which is the right baling press for you?

It is not always easy to decide which is the right system for a particular disposal task. We have specialists and dealers all over the world who can analyse your needs on site and give you detailed advice. Only then can you be sure that you will get the right baler to suit your specific requirements.

### When does a baling press start paying for itself?

Are you wondering what financial benefits a baling press might have over your existing disposal system? We will calculate the costs you will save by using a baling press rather than external disposal for your individual situation.

### What quality can I expect from HSM?

We build high-quality, reliable products to the highest standards of German engineering. In order to meet these standards, we produce the majority of components ourselves, and are certified according to DIN EN ISO 9001.

### How long is my warranty?

All our baling presses have a one-year warranty (in single-shift operation).

### And if something does go wrong?

We certainly won't leave you alone. Our service guarantees personal support in all service issues – before and after purchase! Our agents and trading partners provide advice and assistance in many countries worldwide.

### HSM all-round service...

... ensures that you no longer have to worry about maintenance prevention. HSM offers service contracts for every need – for the long service life of your press and to save you money.

### Renting our baling presses?

HSM provides you the option of renting our baling presses. There are various possibilities, which our sales team will be happy to explain.

### Any special wishes?

Some materials place special demands on a baling press. HSM offers various versions to meet these requirements. Special solutions are also available on request.

# HSM – the company.

## Cutting. Shredding. Compressing.



When Hermann Schwelling founded his one-man company in 1971, he had two ideals writ large: innovation and quality. These merits are the basis of the success in the office and environmental technology business sectors. Over the years, HSM has gradually grown and become a company which is active around the world, but which still stays true to its German roots.

**Enquire now! We're always glad to help.**

#### Head office Deutschland:

HSM GmbH + Co. KG · Austrasse 1 - 9 · 88699 Frickingen / Germany  
Tel. +49 (0) 75 54 / 2100-0 · Fax +49 (0) 75 54 / 2100-160  
info@hsm.eu · www.hsm.eu

#### E-Mail / Hotline:

Gratis Hotline  
DE, AT, BE, NL, LU, DK  
Tel. 00800 4 4777766  
Fax 00800 4 4777767

HSM Vertrieb Deutschland  
Deutschland@hsm.eu

HSM Vertrieb Österreich  
Austria@hsm.eu

HSM Verkoop België, Nederland,  
Luxemburg  
Benelux@hsm.eu

HSM Salgs Support Danmark  
Danmark@hsm.eu

HSM Commerciale Italia  
Italia@hsm.eu

#### HSM subsidiaries and sales offices:

HSM GmbH + Co. KG  
Oficina Barcelona  
C/Tona  
Nave n° 15 "El Lago"  
Pol. Ind. Monguit  
08480 L'Ametlla del Vallès  
Barcelona  
Spain  
Tel. +34 93 8617187  
Fax +34 93 8463417  
Spain@hsm.eu  
www.hsm.eu

HSM France SAS  
Parc de Genève  
240, Rue Ferdinand Perrier  
69800 Saint-Priest  
France  
Tél. +33 472 210580  
Fax +33 472 517481  
France@hsm.eu  
www.hsm.eu

HSM of America LLC  
419 Boot Road  
Downingtown  
PA 19335  
USA  
Tel. +1 484 237-2308  
+1 800 613-2110  
Fax +1 484 237-2309  
customerservice@hsmofamerica.com  
info@hsmofamerica.com  
www.hsmofamerica.com

HSM (UK) Ltd.  
14 Attwood Road / Zone 1  
Burntwood Business Park  
Burntwood · Staffordshire  
WS7 3GJ  
United Kingdom  
Tel. +44 1543 272-480  
Fax +44 1543 272-080  
info@hsmuk.co.uk  
www.hsmuk.co.uk

HSM Polska Sp. z o.o.  
ul. Emaliowa 28  
02-295 Warszawa  
Poland  
Tel. +48 22 862-2369  
Fax +48 22 862-2368  
info@hsm Polska.com  
www.hsm.eu

# HSM®